

GRAPHIC SCALE
(m.m.)
1 inch = 30 ft.



LEGEND

	ROAD LINE
	PROPERTY LINE AND/OR SETBACK
	EXISTING YARD OR LOT LINE
	PROPOSED FENCING LINE
	15' x LANDSCAPE AREA

[illegible]

W CANAL DRIVE ROW

GOLDEN STATE HWY

APN: 089-014-034
(18P)

AFN: 089-014-007
(IBP)

N WALNUT ROAD

730 N. WALNUT ROAD
TURLOCK, CA 95380
APN: 089-014-033

DATE: JULY 6, 2018
SCALE: 1" = 30'

A-1

PROJECT DATA

PROPERTY OWNER
Western Truck Center
730 N Walnut Road
Turlock, CA 95360

STORM DRAIN:
THERE IS NO EXISTING STORM DRAIN ADJACENT TO THE PROPOSED STORM DRAIN. THE DRAIN IS BEING PROPOSED AS PART OF THE PROJECT.

UTILITY RIGHT-OF-WAY/ASSESSMENTS NOTE:
THERE IS NO UTILITY RIGHT-OF-WAY OR EASEMENTS LOCATED ON THE PROPERTY.

DEVELOPMENT/REGULATION NOTE:
THE PROPOSED DEVELOPMENT IS LOCATED WITHIN THE 100-YEAR FLOOD ZONE. THERE ARE NO REGULATION OR DAMAGE FACTORS ON THE PROPERTY.


LANDSCAPE OBSERVATIONS NOTE:
ALL CURRENT AREA LANDSCAPE WILL BE MAINTAINED BY A LANDSCAPE MAINTENANCE ASSOCIATION. THERE ARE NO RESERVATIONS FOR PARKS, SCHOOLS OR OTHER PUBLIC USES.

[illegible]

Electric Guard Dog

350 Assembly St., 5th Floor
Columbia, SC 29201
PHONE: 803-786-6333
FAX: 803-104-5378

81618

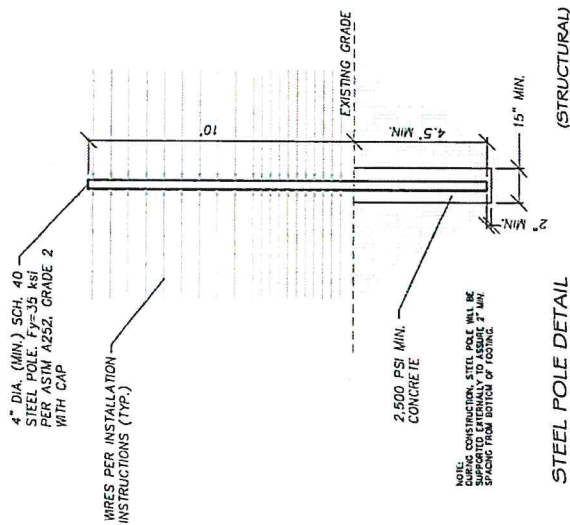WIRES PER INSTALLATION -
INSTRUCTIONS (TYP.)


2,500 PSI MIN.
CONCRETE

NOTE: DURING CONSTRUCTION, STEEL POLE WILL BE SUPPORTED EXTERNALLY TO ASSURE 2" MIN. SPACING FROM BOTTOM OF FOOTING.

STEEL POLE DETAIL

(STRUCTURAL)

NTS

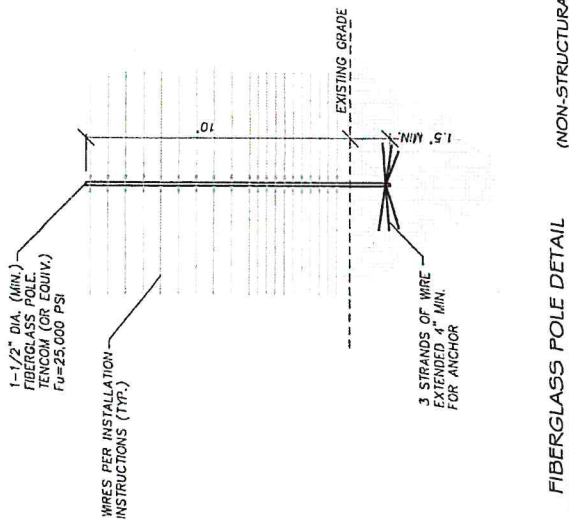

WIRES PER INSTALLATION INSTRUCTIONS (TYP.)

3 STRANDS OF WIRE
EXTENDED 4" MIN.
FOR ANCHOR

FIBERGLASS POLE DETAIL

(NON-STRUCTURAL)

NTS



ALARMED AND MONITORED


7.000

The Electric Guard Dog

ALARMADO Y SUPERVISADO

PELIGRO! Cerca Eléctrica

NOTE: BOTH ENGLISH AND SPANISH VERSION OF THE "WARNING SIGN" WILL BE PLACED EVERY 50 FEET MAXIMUM.



No. C-60561

EXP 12-31-

1111

1111

8161

[illegible]

RAPID TIGHTENERS
RACE TIGHTENERS ARE INSTALLED IN THE SECTION BETWEEN THE PITCHES AND 3 FEET FROM A HORIZONTAL POLE—TOWARD THE CENTER OF THE HULL.

THE TIGHTENERS ARE ATTACHED ON OPPOSITE SIDES OF THE POLE TO PREVENT SEQUENCING FROM MISSING BOTH.

WIND SHOULD BE BLASTING TWO OR THREE TIMES AROUND EACH TIGHTENER.

WARNING SIGNS
WARNING SIGNS MUST BE INSTALLED EVERY 30 FEET, WHEN IN THE MAXIMUM DISTANCE BETWEEN WARNING SIGNS.

THE EXTREMELY NOISY LANGUAGE
SUGGESTED BY ALTERNATIVE 2D MAY HAVE IMPROVED THE SILENCE, BUT IS FOLLOWED BY ONE SHOWING THE STANCH ARE TO PEOPLE SITUATED OUTSIDE THE SPACE.

ALL WARNING SIGNS SHOULD BE
REMOVED BETWEEN WAYS 12 & 13.

3 STRANDS OF WIRE
EXTENDED 4 INCHES
FOR ANCHOR.

EXAMPLE WARNING SIGNS

NTS

WIRE CONNECTIONS

WTS

Electric Guard Dog
550 Assembly St., 5th Floor
Columbia, SC 29201
PHONE: 803-786-6333
FAX: 803-404-5378

550 Assembly St., 5th Floor
Columbia, SC 29201
PHONE: 803-786-6333
FAX: 803-404-5378

100

87
5333
101
9 17

..54
: 292
786-0
4-53

Product: REQUEST TO AUTHORIZE A SECURITY SYSTEM
730 N. WALNUT ROAD
TURLOCK, CA 95380
APN: 089-014-033

APN: 089-014-033


S

DATE: JULY 6, 2018
SCALE: N/A

UA

A-2

[illegible]

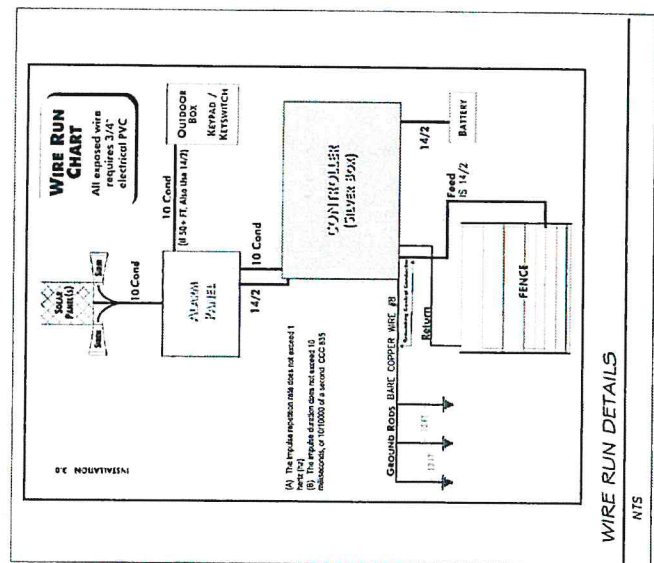

~~7.9.18~~